
ESD Conductive Grid Tape

Sold in Sleeves

Product Specifications	
Measurement	Value
Thickness	1.9 mils
Adhesive	acrylic based
Grid Material	oriented polypropylene
Conductiity of Grid Layer	10^3 to 10^4 Ohms / S1 (ASTM D-257)
Resistivity of Anti Static Layers	$\leq 10^9$
Maximum Temperature	60° C / 140° F
Core Size	74mm / 3 inches
Electricals	< 1.OE + 12 (Top Side)
	< 1.OE + 9 (Tacky Side)
Tribocharging	< 100 Volts (Top Side)
	< 100 Volts (Tacky Side)

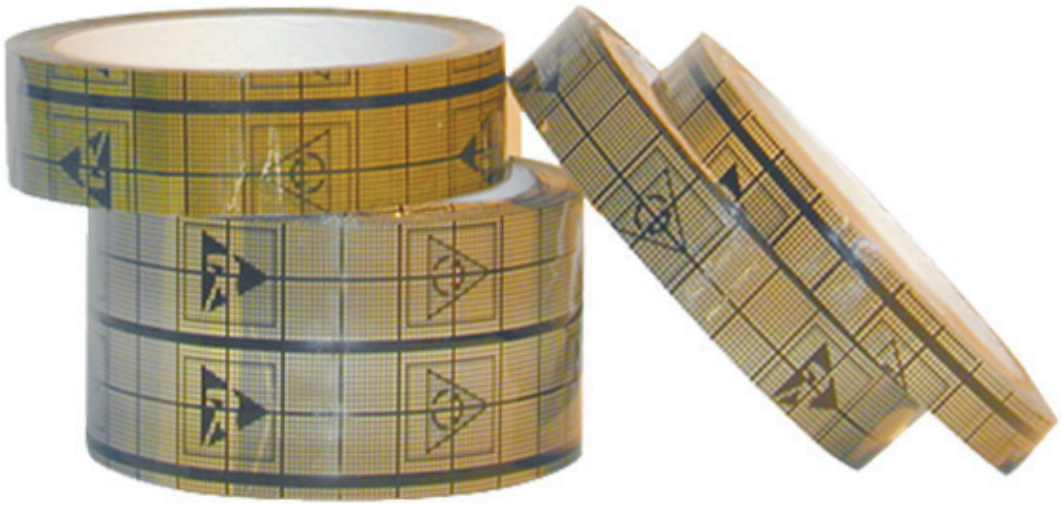

MAIL: 888 Dayton Street Ste 105 Yellow Springs, OH 45387 **E-MAIL:** sales@elimstat.com **WEBSITE:** elimstat.com

TOLL FREE: (888) 423-6638 **OFFICE:** (937) 993-0300 **FAX:** (937) 324-8753