

Material Specifications

5300 Series Mats



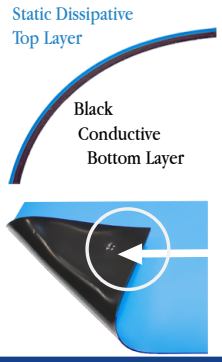

5300 Series Mats are grounded by installing snaps so that a ground can be installed on the top of the mat.

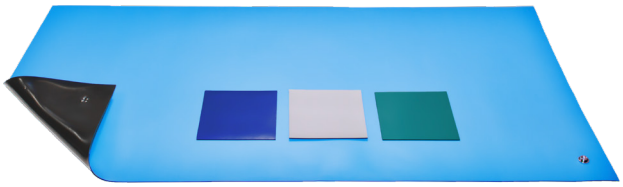

5300 Series			
Physical Properties	Units	Typical Values	Test Method
Thickness	Inches	.080	ASTM D-2103
Tensile Strength • Top Layer	kg / sq. cm	> 120	ASTM D-412
Tensile Strength • Bottom Layer	kg / sq. cm	> 160	ASTM D-412
Tear Strength • Top Layer	kg / cm	> 90	ASTM D-412
Tear Strength • Bottom Layer	kg / cm	> 100	ASTM D-412
Elongation • Top Layer	%	350	ASTM D-412
Elongation • Bottom Layer	%	250	ASTM D-412
Hardness • Top Layer	Shore A	50	ASTM D-2240
Hardness • Bottom Layer	Shore A	60	ASTM D-2240
Gravity • Top Layer	-	1.3	ASTM D-792
Gravity • Bottom Layer	-	1.4	ASTM D-792
Electrical Properties	**Units**	**Typical Values**	**Test Method**
Surface Resistivity • Top Layer	ohms / sq.	$< 10^9$	ASTM D-257
Surface Resistivity • Bottom Layer	ohms / sq.	$< 10^5$	ASTM D-257
Volume Resistivity • Top Layer	ohms / sq.	$< 10^8$	ASTM D-257
Volume Resistivity • Bottom Layer	ohms / sq.	$< 10^4$	ASTM D-257
Static Decay	seconds	< 0.01	EIA-541
Temperature Tolerance	Fahrenheit / Celsius	187°F / 86°C	

- This product meets the ANSI /ESD S20.20 S4.1 and S7.1 Standards for ESD Worksurfaces

MAIL: 888 Dayton Street Suite 105 Yellow Springs, OH 45387 **E-MAIL:** sales@elimstat.com **WEBSITE:** elimstat.com

OFFICE: (937) 993-0300 **FAX:** (937) 993-0307